

Mounting Options

ByLine

12 volt Insulated Cable System



Description: A unique surface mount lighting system using a pair of stranded cables to carry low voltage current. Ideal for spanning an open space or lighting a challenging location.

Available Finishes: Penny -01, Nickel -02, Brass -03, Matte Nickel -08


Requirements: Universal connectors are needed for fixtures other than those shown. For standard installation, anchors, tension devices, isolators or connectors may be needed. See individual fixture specifications for bulb and bulb supplement details.

Options / Accessories:



#3112 Universal Connector


#3101 Short Anchor, #3102 Long Anchor, #3103 Tension Device, #3104 Dead End Connector, #3106 Isolator

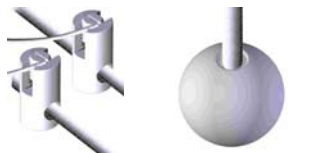


#3111 Cable Feed, #8001 Sphere



Space Wheel—Short #3120, Long #3121



Finial—Small #8003, Large #8004

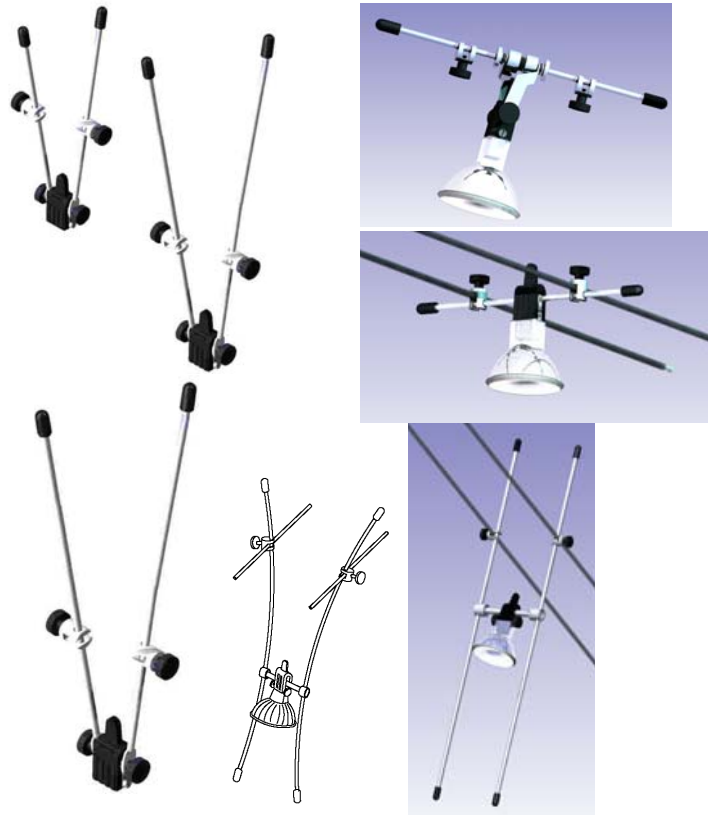

Fixtures shown above: Left—5" Short Legs, 15" Long Legs, 36" Daddy Long Legs, 16" Ballet. Right from top—6" Straight Balance, 6" Omni Star, 16" Tango



UL-1574 - Mfg. exclusively for ImageCrafters by HighLights LTD. Bogata, Columbia

NEWWORLD Lighting

7 Jewett Hill, Ipswich, MA 01938

978-380-6476

FAX: 978-380-6481

www.newworldlightinginc.com